


2017/1/1



WANROOEMED

PATIENT TRANSFER STRETCHER

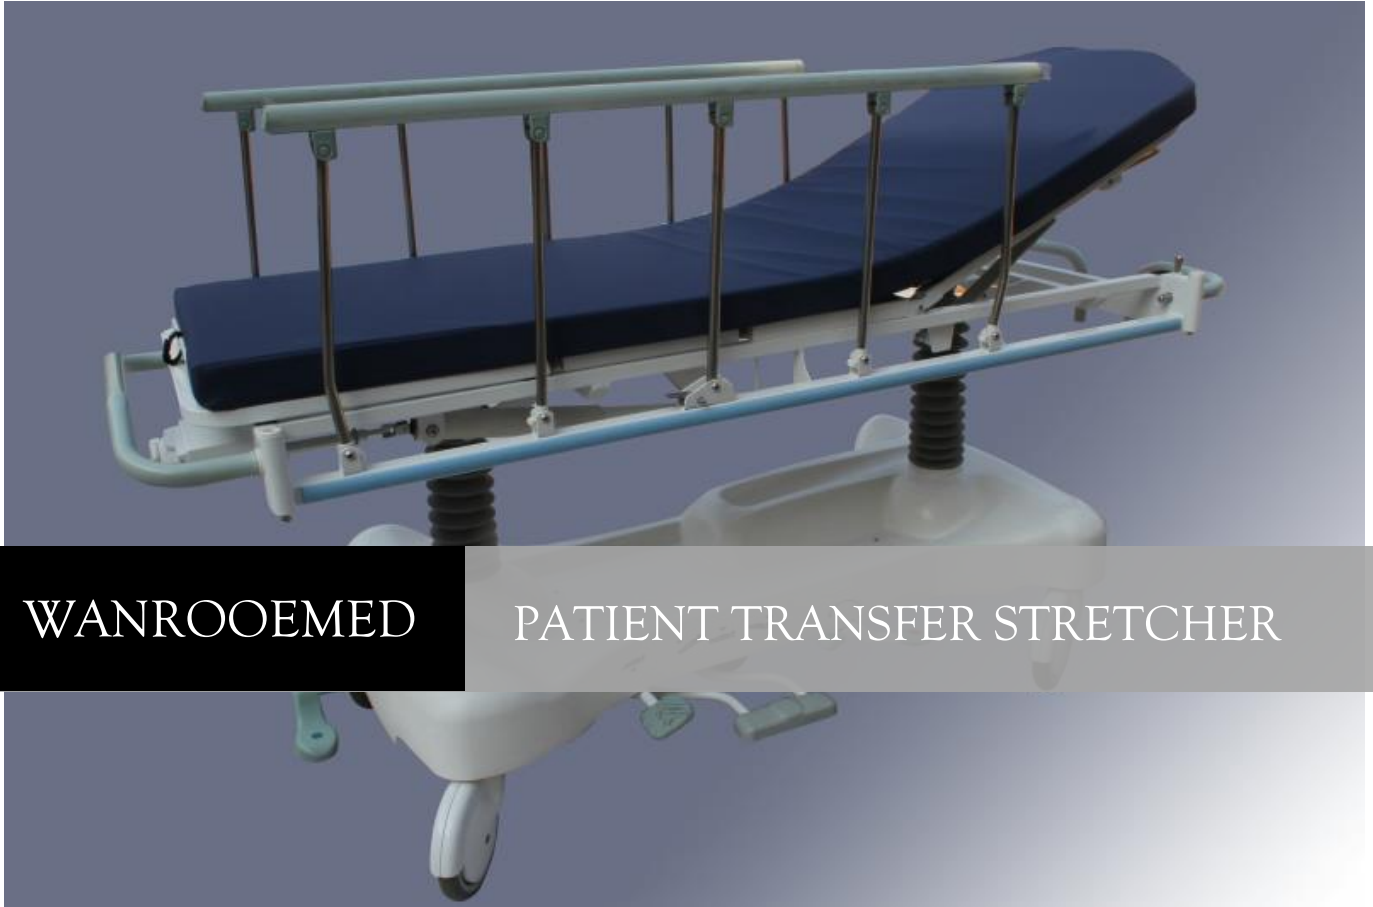

PATIENT HOSPITAL TROLLEY | QUALITY PRODUCTS

www.wanrooemed.com



WANROOEMED

Main Features

550 lb capacity: WANROOEMED supply hospital stretcher up to 550-pound weight capacity for all of its hospital stretchers.

Power source: Linak motors supply stable power source for electric stretchers, power-packer brand from Actuant hydraulic oil pump supply stable power source for hydraulic hospital stretcher.

Scale: A built-in LCD scale showing weight value simultaneously and eliminating the need to toggle between the two. This highly accurate scale (0.1KG, or 0.05KG, 0.02KG) is available.

Fowler position Feature: This feature uses the patient's own weight to help you raise and lower the head section of the stretcher easily and comfortably.

Integrated IV Stand: equipped with IV stand for these hospital stretchers

Brakes: 4-wheel control locking brakes with integrated steel teeth promote a strong, stable platform.

Warranty: WANROOEMED 's warranty is 1 year for all parts, lifetime repair.

OEM and ODM service: We have our own R&D department, we supply customer OEM and ODM service. We have our own mould and our own injection machine, blow molding machines and other equipment, which all guarantee our product quality and delivery time.

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD303 Hydraulic Hospital Stretcher with weighting scale

WANROOEMED's **BD303 Hydraulic Hospital Stretcher** is the ideal choice for Emergency, OR, PACU or ASC use. This stretcher offers patient and caregivers excellent mobility, comfort and quality.

Mobility: WANROOEMED's innovative steering plus system allows stretcher easy to stop and steer. In addition, it prevents vibrations by self adjustment. Larger wheels of 8" make the movement more stable and comfortable. A standard redundant-locking, four-wheel braking system provided for a strong, stable platform.

Comfort: fowler feature provides the caregiver with easier head section adjustment. Our innovative air mattress give patient comfortable feeling to overcome pressure ulcers due to overcrowding during extended periods.

Quality: Our reinforced stretcher frames are made of heavy-gauge, cold rolled steel after twice phosphorizations for long-lasting use life. PP extra strong undercarriage, good capacity, easy to clean.

WANROOEMED focused on patient and caregiver safety, we supply stretchers at affordable price and good quality to cover most of patients and caregiver.

TO ORDER:TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



After test, capacity is up to 550lb.

Instruction:

1. 550lb weight capacity
2. Low height(22.5'') for safe stretcher ingress and egress-best in class
3. Radiolucent deck(back section)
4. Fowler mechanism provides easier articulation of the head section
5. Hand brake ★
6. Integrated dual display scale
7. Ergonomic push handles
8. IV pole holders on 4 corners, IV pole, drainage hook
9. Integrated oxygen holder★
10. Steering plus system
11. Redundant-locking, 4 wheels brakes

★optional feature

Material:

1. The frame is steel with coating by twice electrostatic spray
2. Power-packer brand from Actuant hydraulic oil pump supply stable power source for hydraulic hospital stretcher..
3. Back board is made of American electrotyped board with X-ray cassette.
4. Once injection PP undercarriage
5. Stainless steel handrails

Features:

Standard Features Optional Features

	Standard Features	Optional Features
550 lb weight capacity	●	
32'' overall width(siderails up)	●	
24.5'' width (bed surface)	●	
Fowler position-mechanism	●	
manual knee position by handle		●
Active hand brake	●	
Four wheel braking system	●	
Four-side brake and steer pedal	●	
Steer plus system	●	
Oxygen tank holder		●
Removable IV pole	●	
Ergonomic push handles	●	
Siderail system(tuck-away)	●	
Radiolucent deck(back section)	●	
3'' density foam mattress	●	
Bumpers in 4 coners	●	
Built-in scale	●	

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



Technical Specifications:

Maximum weight limit.....	550lbs(249.5kg)
Low position(floor to top of surface).....	22.5''(57cm)
High position(floor to top of surface).....	35''(88.9cm)
Overall length.....	83''(210.8cm)
Overall width(siderails up).....	32''(81.3cm)
Overall width(siderails stored).....	26.5''(67.3cm)
Siderail length.....	47''(119.4cm)
Siderail height above mattress/surface.....	14''(35.6cm)
Mattress size.....	24.5''(62.3cm)×75''(190.5cm)
Maximum head elevation.....	90°
Maximum foot elevation.....	45°
Maximum Trend/Reverse Trend.....	18°
Floor to base clearance.....	3.5''(8.9cm)
Caster size.....	8''(20.3cm)

BD111 Manual Transfer Stretcher



Type I

Type II

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



WANROOEMED's Transport Stretcher (BD111) is an economical choice for any setting. According to market feedback, this medical hospital stretcher offers good mobility, comfort and quality.

Instructions:

1. The international advanced centrally controlled brake system is applied to the transfer stretcher and therefore stable and reliable.
2. Height adjustment manually by hand cranks
3. Four-sided brake and steer pedals
4. The surface is of separate structure with the back rest section supported by the gas spring.
5. With IV pole, mattress

Material:

1. The transfer stretcher frame is made of cold rolled steel.
2. Surface, side rails and undercarriage are shaped by once injection molding of imported PP, wear-resisting, easy to clean.

Technical Specifications:

Overall Size: 1900*640*560/840mm

Bed surface: 1900*600mm

Height: 570-860mm

Backrest angle: 0-75 °

Castor diameter: 150mm

BD111-4 Multi-function Manual Hospital Transfer Bed



- Dimension: Full length: 197cm Full width: 68cm
- Sleep deck height range: 58-96cm
- Max back elevation: 70°
- Max load: 250kg
- Configuration: PP bed deck, , PP side rails
- Optional: Mattress. IV pole

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111 Manual Transfer Stretcher(simple type)



Comparing with BD111 transfer stretcher, the simple type without four-sided brake and steer pedals, and it is with economic castors of 150 mm diameter. More cheaper than BD111, it is suitable for hospital various choice.

BD3CB Manual Transfer Stretcher(advanced model)



WANROOEMED's Transport Stretcher (BD3CB) is an advanced manual transfer stretcher choice for any setting. According to market feedback, this medical hospital stretcher offers good mobility, comfort and quality. With feature of special siderails.

Instructions:

1. The international advanced centrally controlled brake system is applied to the transfer stretcher and therefore stable and reliable.

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



2. Height adjustment manually by hand cranks
3. Four-sided brake and steer pedals, castor with diameter of 150mm. A shelf up the chassis cover for storage use.
4. The surface is of separate structure with the back rest section supported by the gas spring.
5. **Rotary rollover protective railing, PP bed board produced by blowing molding.**

Material:

3. The transfer stretcher frame is made of cold rolled steel.
4. Surface, side rails and undercarriage are shaped by once injection molding of imported PP, wear-resisting, easy to clean.

Technical Specifications:


Overall Size: 1960*665*500/750mm

Height: 500-750mm

Backrest angle: 0-75 °

Castor diameter: 150mm

BD111A/A1 Hydraulic Transfer Stretcher

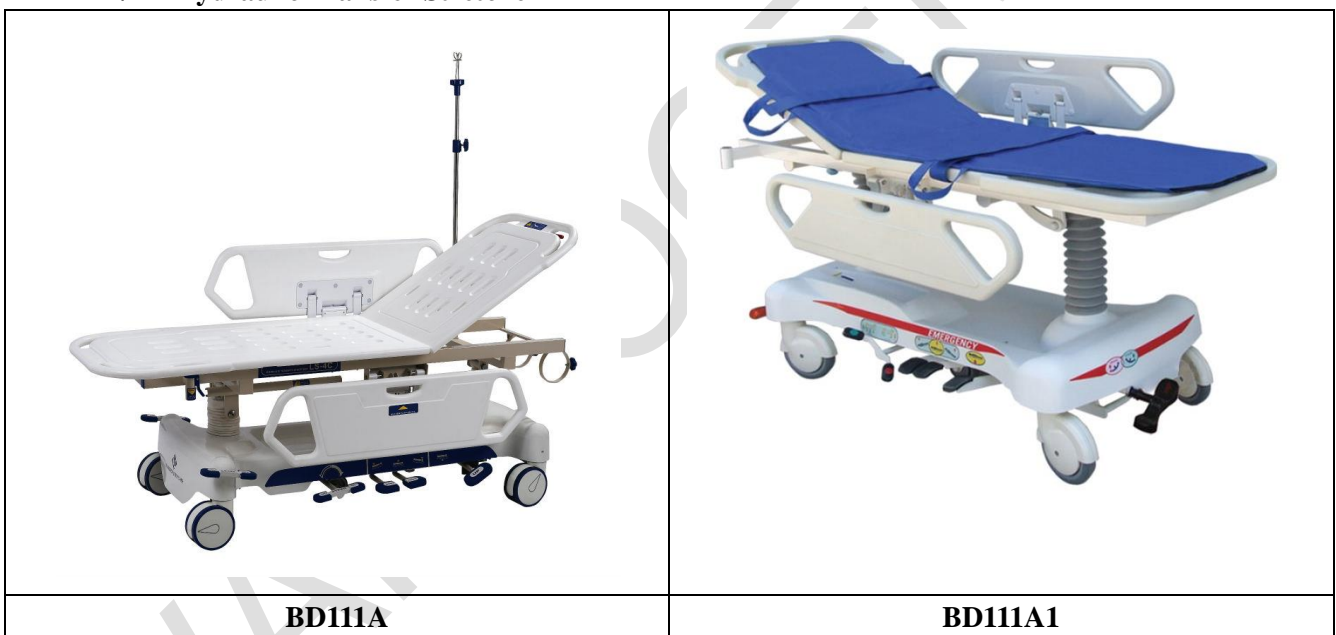

WANROOEMED's **Hydraulic Hospital Stretcher** is the ideal choice for Emergency, OR, PACU or ASC use. This stretcher offers patient and caregivers excellent mobility, comfort and quality.

Mobility: WANROOEMED 's innovative steering plus system allows stretcher easy to stop and steer. In addition, it prevents vibrations by self adjustment. Larger wheels of 8'' make the movement more stable and comfortable. A standard redundant-locking, four-wheel braking system provided for a strong, stable platform.

Comfort: fowler feature provides the caregiver with easier head section adjustment. Our innovative air mattress give patient comfortable feeling to overcome pressure ulcers due to overcrowding during extended periods.

Quality: Our reinforced stretcher frames are made of heavy-gauge, cold rolled steel after twice phosphorizations for long-lasting use life. PE extra strong undercarriage, good capacity, easy to clean.

WANROOEMED focused on patient and caregiver safety, we supply

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663





WANROOEMED

stretchers at affordable price and good quality to cover most of patients and caregiver.

After test, capacity is up to 550lb.

Material:

1. The frame is steel with coating by twice electrostatic spray
2. Double hydraulic oil pump -USA Actuant power-packer oil pumsupply stable power source for hydraulic hospital stretcher.
3. Once injection PP undercarriage
4. PP siderails, PE platform

Features:

	Standard Features	Optional Features
550 lb weight capacity	●	
27.5'' overall width(siderails up)	●	
24.5'' width (bed surface)	●	
Fowler position-mechanism	●	
Four wheel braking system	●	
Four-side brake and steer pedal	●	
Steer plus system	●	
Oxygen tank holder	●	
Removable IV pole	●	
Mattree	●	
PP siderails	●	

Technical Specifications:

Maximum weight limit.....	550lbs(249.5kg)
Low position(floor to top of surface).....	24.8''(63cm)
High position(floor to top of surface).....	36.6''(93cm)
Overall length.....	75''(190.5cm)
Overall width(siderails up).....	27.5''(70cm)
Overall width(siderails stored).....	22''(56cm)
Siderail length.....	43.5''(110.5cm)
Siderail height above mattress/surface.....	13.5''(34cm)
Maximum head elevation.....	30 °
Maximum Trend/Reverse Trend.....	15 °
Caster size.....	6''(15.24cm) for A type,8'' for A1 type

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111AA Electric Stretcher



Instructions:

1. It is a type of electric stretcher. Linak motors supply power source, the bed provides 250kg capacity.
2. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
3. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
4. Fowler position is reached by gas spring.

Material:

1. The frame is steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, PP siderails, PP platform

Technical Specifications:

Overall Size: 1930*700*630/930mm (mattress not included)

Bed surface: 1900*600mm

Backrest max upward angle: 75 °

Height adjustment: 630/930mm

Trendelenburg: 18 °

Reverse-trendelenburg: 18 °

Standard Accessories: IV pole, mattress

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111B Hydraulic Hospital Stretcher



Instructions:

1. Double hydraulic oil pump from USA power-packer brand of Actuant supply stable power source for hydraulic hospital stretcher.
2. Back section is made of USA Electrolytic wood with X-ray cassette.
3. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
4. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
5. Fowler position is reached by gas spring.
6. Knee section manual control by hand crank.
7. Ergonomic push handles.
8. Frames with red rubber strip, beauty and anticollision.
9. Four wheel braking system and steering system reach mobility easily and convenient.

Material:

1. The frame is cold rolled steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, PP siderails, PP plateform, anticollision, easy to clean.

Technical Specifications:

Size: 2100*800*530/860mm(mattress not included), if include mattress: 590-920mm

Backrest max upward angle: 90 °

Footrest max upward angle: 45 °

Height adjustment: 530/860mm

Trendelenburg:18 °

Anti-trendelenburg:18 °

Standard Accessories:

IV pole, mattress(6cm thickness), mattress size: 1940*63.5cm

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111BA Electric Stretcher



Instructions:

1. It is a type of electric stretcher. Linak motors supply power source, the bed provides 250kg capacity.
2. Back section is made of USA Electrolytic wood with X-ray cassette.
3. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
4. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
5. Fowler position is reached by gas spring.
6. Knee section manual control by hand crank.
7. Ergonomic push handles.
8. Frames with red rubber strip, beauty and anticollision.
9. Four wheel braking system and steering system reach mobility easily and convenient.
10. Stailness steel siderails, or aluminum alloy siderails.

Material:

3. The frame is cold rolled steel with coating by twice electrostatic spray
4. Linak motors supply power source, the bed provides 250kg capacity.
5. Once injection PP undercarriage, PP siderails, PP plateform, anticollision, easy to clean.

Technical Specifications:

Size: 2100*800*720-950mm

Backrest max upward angle: 90 °

Footrest max upward angle: 45 °

Trendelenburg:18 °

Anti-trendelenburg:18 °

Standard Accessories:

IV pole, mattress

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111BB Hydraulic Transfer Stretcher



Instructions:

1. Double hydraulic oil pump from USA power-packer brand of Actuant supply stable power source for hydraulic hospital stretcher.
2. Full bed surface is made of USA Electrolytic wood with X-ray cassette.
3. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
4. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
5. Fowler position is reached by gas spring.
6. Knee section manual control by hand crank.
7. Ergonomic push handles.
8. Frames with red rubber strip, beauty and anticollision.
9. Four wheel braking system and steering system reach mobility easily and convenient.
10. Stailness steel siderails, Oxygen cylinder storage, Roller bumper

Material:

1. The frame is cold rolled steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, PP siderails, PP plateform, anticollision, easy to clean.

Technical Specifications:

Size: 2100*800*600-902.5mm (**mattress not included**)

Backrest max upward angle: 90 °

Footrest max upward angle: 45 °

Trendelenburg:18 °

Anti-trendelenburg:18 °

Standard Accessories: IV pole, mattress(6cm thickness standard, 194*63.5cm) **Optional accessories:** instrument desk

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111BB Hydraulic Transfer Stretcher with 3 stages side rail



Feature:

1. 3 stages collapsible safety side rail
2. Double hydraulic oil pump from USA power-packer brand of Actuant supply stable power source for hydraulic hospital stretcher.
3. Full bed surface is made of USA Electrolytic wood with X-ray cassette.
4. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
5. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
6. Fowler position is reached by gas spring.
7. Knee section manual control by hand crank.
8. Ergonomic push handles.
9. Four wheel braking system and steering system reach mobility easily and convenient.
10. Roller bumper
11. Oxygen cylinder storage

Material:

1. The frame is cold rolled steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, PP siderails, PP platform, anticollision, easy to clean.

Technical Specifications:

Size: 2100*800*600-902.5mm (mattress not included)

Backrest max upward angle: 90 °

Footrest max upward angle: 45 °

Trendelenburg: 18 °

Anti-trendelenburg: 18 °

Standard Accessories: IV pole, mattress(6cm thickness standard, 194*63.5cm)

Optional accessories: Restraint belts and Monitor table

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111BC Transfer Stretcher



Instructions:

1. Double hydraulic oil pump from USA power-packer brand of Actuant supply stable power source for hydraulic hospital stretcher.
11. Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
12. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
13. Fowler position is reached by gas spring.
14. Knee section manual control by hand crank.
15. Ergonomic push handles.
16. Frames with red rubber strip, beauty and anticollision.
17. Stailness steel siderails
18. Oxygen cylinder storage
19. Roller bumper

Material:

1. The frame is cold rolled steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, aluminum alloy siderails, PP plateform, anticollision, easy to clean.

Technical Specifications:

Size: 2100*800*550/880mm

Backrest max upward angle: 90 °

Footrest max upward angle: 45 °

Trendelenburg:18 °

Anti-trendelenburg:18 °

Standard Accessories: IV pole, mattress(6cm thickness)

Optional accessories: Restraint belts and Monitor table

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD111D Electric Stretcher



Instructions:

1. It is a type of electric stretcher. Linak motors supply power source, the bed provides 250kg capacity.
2. Height adjustment, can be reached by foot pedal easily.
3. Four wheel braking system, steering system, 200mm diameter castors reach mobility easy and convenient.
4. Fowler position is reached by gas spring.

Material:

1. The frame is cold rolled steel with coating by twice electrostatic spray
2. Once injection PP undercarriage, PP siderails, PP platform, anticollision, easy to clean.

Technical Specifications:

Size: 1930*640*540-840mm

Backrest max upward angle: 90 °

Height adjustment: 540-840mm

Standard Accessories:

IV pole, mattress

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD26A Manual Transfer Stretcher for Operating Room



Size: 3650*640*640/970mm_

Instruction:

It is a manual connecting transfer stretcher, avoid to cross-infection in hospitals.

Material:

Bed surface and side railing made of imported PP.

Guide rails made of die-casting of fine aluminum alloy.

Frame is made of steel with plastic coating.

Functions:

1. Height adjustable for each trolley is from 640mm to 970mm
2. Two separate carts can be controlled independently.
3. When the two small carts are adjusted to the same level, lower bed surface can be slipped smoothly along the aluminum alloy guide rail into another cart.
4. As the bed slides to any separate cart, it can be automatically locked and equipped with safety device.
5. With direct castor, easy to control directions.
6. Back rest can be adjusted by gas spring.

Standard Accessories:

IV pole, bed cushion

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD7C Electric Patient Trolley



It is a type of electric transfer stretcher, functions activated by electric power and gas spring and cranks system together, storage battery available;

At the head-end, there is a pair of push-handles, can be folded up and down;

Central-lock castors, diameter 150mm. Matched with direction castor, help the operator controlling the direction easily

Bed Board For X-Ray Examination

Linak motor, and with battery.

Size: 2100*760mm

bed board surface: 1,750 x 620mm

Five functions

Hi-low range: 800mm-550mm;

Backrest angle: 0-60 °

Knee angle: 0-40 °

Trendelenburg & Rev. Trendelenburg: 0-12 °

Standard Accessories:

IV pole, mattress

Packing: 1.12CBM/PC

N.W: 90kgs.

TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663



BD7CB Hydraulic Patient Transfer Stretcher

Instructions:

1. Double hydraulic oil pump from USA power-packer brand of Actuant supply stable power source for hydraulic hospital stretcher.
2. Back section X-ray available with X-ray cassette.
Trendelenburg/reverse-trendelenburg, height adjustment, can be reached by foot pedal easily.
3. Four wheel braking system, steering system, 150mm diameter castors reach mobility easy and convenient.
4. Fowler position is reached by gas spring.
5. Knee section manual control by hand crank.
6. Ergonomic push handles.
7. Frames with red rubber strip, beauty and anticollision.
8. Four wheel braking system and steering system reach mobility easily and convenientt.

Material:

Main material: X-ray permeable plastic bed board, stainless steel side rail, steel frame, hydraulic pumps, plastic chassis cover and metal chassis.

Technical Specifications:

Bed board dimension: 1,750 x 620mm.

Size: 2100*852* 835mm-600mm

Backrest max upward angle: 60 °

Footrest max upward angle: 40 °

Height adjustment: 835mm-600mm

Trendelenburg:13 °Anti-trendelenburg:13 °

Packing:1.12CBM/PC N.W:90kgs.

Standard Accessories:

IV pole, mattress



TO ORDER:

TEL: 0086-512-58810860
www.wanrooemed.com

FAX: 0086-512-58810663

