医用病床系列

● BAE521EC Luxurious electric ICU bed

Overall size: 2175mm±10mm (Stretchable length 2320)
Overall width: 990mm

01 Split up and down side rail

The new split is comply with safety standardsIEC60601-2-52, gap between front and rear pieces narrowed, without the need of guardrail barrier, move the same time as the action of bed movement, the maximum protection of the safety of patients.

02 Operator

Special operation panels on both sides of guardrail to facilitate the operation of medical personnel, the panel is equipped with remote control lock button to prevent misuse of patients.
Add a safe position indicator light, when the bed body is set in the lowest position, the display green light to facilitate medical staff to confirm the safety of position at night patrol.

03 New safety guardrail

The guardrail can be only operated from outside, but not internal.

04 The Ball type angle indicator

The bed comes with a ball-type angle indicator to facilitate medical staff to confirm.

05 Manual CPR

Bed with manual CPR on both sides, in case of emergency or power failure, can make the bed board in the ascendant state quickly return to the horizontal state.

06 Handhold operator

Equipped with a hand-held remote control, operating freely.

07 Ergonomic guardrail

The upper part of the guardrail is the shape easy to hold, patient can stand up when the help bar.(can put mobile phone glasses, etc.)

08 Binding device

Under the bed board, comes with binding devices,5 pcs each side.

09 Drainage bag hook

Both sides of the bed board, a total four drainage bag hooks.

10 Back bed board C-type rise

The back plate is C-way rise, can effectively reduce the long-term bedridden patients suffering from pressure ulcers, preventing posture down.

11 Central locking system

Germany TENTE diameter 125mm medical double-sided casters with locking, free, directional three-stage central control locking device, anti-corrosion, good acid resistance.

Four motor bed position function display:



Back up 0-75° | Knee up 0-45° | Back&knee joint linkage | Height adjustment: 420-800mm | Trendelenburg: 0-16° | Anti-trendelenburg: 0-16° | One-touch heart chair position | Manual + electric CPR

WANROOEMED

医用病床系列

BAE522-EC Luxurious Electric ICU bed

Surface size: length1940mm*width915mm
Bed size: length 2180*1080mm

01 Power, nurse call, alarm signal is connected on the terminal

02 Ergonomic guardrail

Each corner has one pair of the Orthopedic traction frame holes.

03 IV Pole holes

Each corner has the IV pole hole
When there is no use, it can be stored at the bottom of beds.

04 Lifting controller (for nurse use)

Embedded on the outside of the backrest, can be operated with all the functions.
The image is easy to recognize and operate.

05 Side rails

4 pieces impact-resistant ABS side rails, the backrest and footrest can be operated separately to control the patients.

It uses ABS injection molding, durable and strong enough to resist the impact, smooth and soft, anti-rust.
Safe operation panel, to ensure the nurse safety.

06 Lifting controller (for patient use)

Embedded on the outside of the backrest, can be operated with all the functions.
The image is easy to recognize and operate.
With the switch of the night light, easy for patients to get out of the beds.
With the switch button of nurse call system, easy to call the nurse.

07 Impact-resistant ABS plastic steel bed board

4 pieces detachable impact-resistant ABS plastic steel bed board, uses One injection molding, with the advantage of high load-bearing, easy to clean and disinfect, non-conductive, anti-rust, and easy maintenance .

08 Electric CPR button

With Electric CPR buttom at the both sides for emergency, the bed surface can be flat in a second.

09 H Wheels

5”central-braking wheels

10 Central-braking system

The central-braking system is easy to operate and be flexible, and there is a dust cover on the outside of the wheel to prevent the hair from getting into the axle.

11 Headboards/footboards tightening device

The tightening device is fixed with a rotary plate and is easy to operate. When push bed , the end of the bed board will not shake and sound easily.

12 Intelligent LCD control panel

13 Impact ABS headboard/footboard

Resistant ABS material injection molding, easy to clean, ergonomic design Push handle to facilitate push, quickly removed in emergency

WANROOEMED

医用病床系列

BD002-F Rise and Fall stretcher cart Functional Presentation

01 Back lift

Using gas spring to lift.

02 Oxygen bottle holder

Oxygen capacity 500 liters
(Diameter 105-115mm)

03 Horizontal position for side rails

Side rails can be fixed at a horizontal position for drip and puncture. Pressure for 10kg.

04 Base cover

Two sections for base cover, 6 leaking holes, loading capacity 10kg.

05 German TENTE casters with central lock

150mm diameter casters with lock pedal on four corners, Grounding effect.

WANROOEMED

06 New style side rails

Concave design can prevent catheter slide



07 Bed body

Direction of travel at a glance.

08 Movable mattress

Three sections, Fabric can be washed, electro-static prevention.

09 W shape safety lock

Set a safety lock on the foot side, improved security.

10 Fifth Wheel

Easy controlling the direction of the bed when it' s moving.

How to move a patient from a bed to a stretcher cart by one nurse

1. Put the stretcher cart near the bed, make sure all casters are locked, then let the stretcher cart lower than the bed in order to move the patient.

2. Let the patient lie on the side, and then the movable mattress is tiled in patients below.

3. Use the movable mattress to slowly moving the patient to the stretcher cart from the bed.

4. Erecting the stretcher cart side rails, and make sure the patient is tied up in bed, and then unlock the casters.

医用病床系列

BD006-F Professional first aid nursing bed

It is a multifunctional modern medical nursing bed.

01 Side bumper
02 Push handle
03 Back lift operating lever
04 Central lock caster
05 IV pole
06 Rising Pedal
07 Falling pedal and Tilt function pedal
08 Central lock pedal
09 Fifth wheel pedal
10 Oxygen bottle holder
11 Drainage bag hook
12 Double safety lock
13 T shape design
14 Rotary side rails
15 Mattress
16 Crank handle for leg rest
17 Recording board (optional)

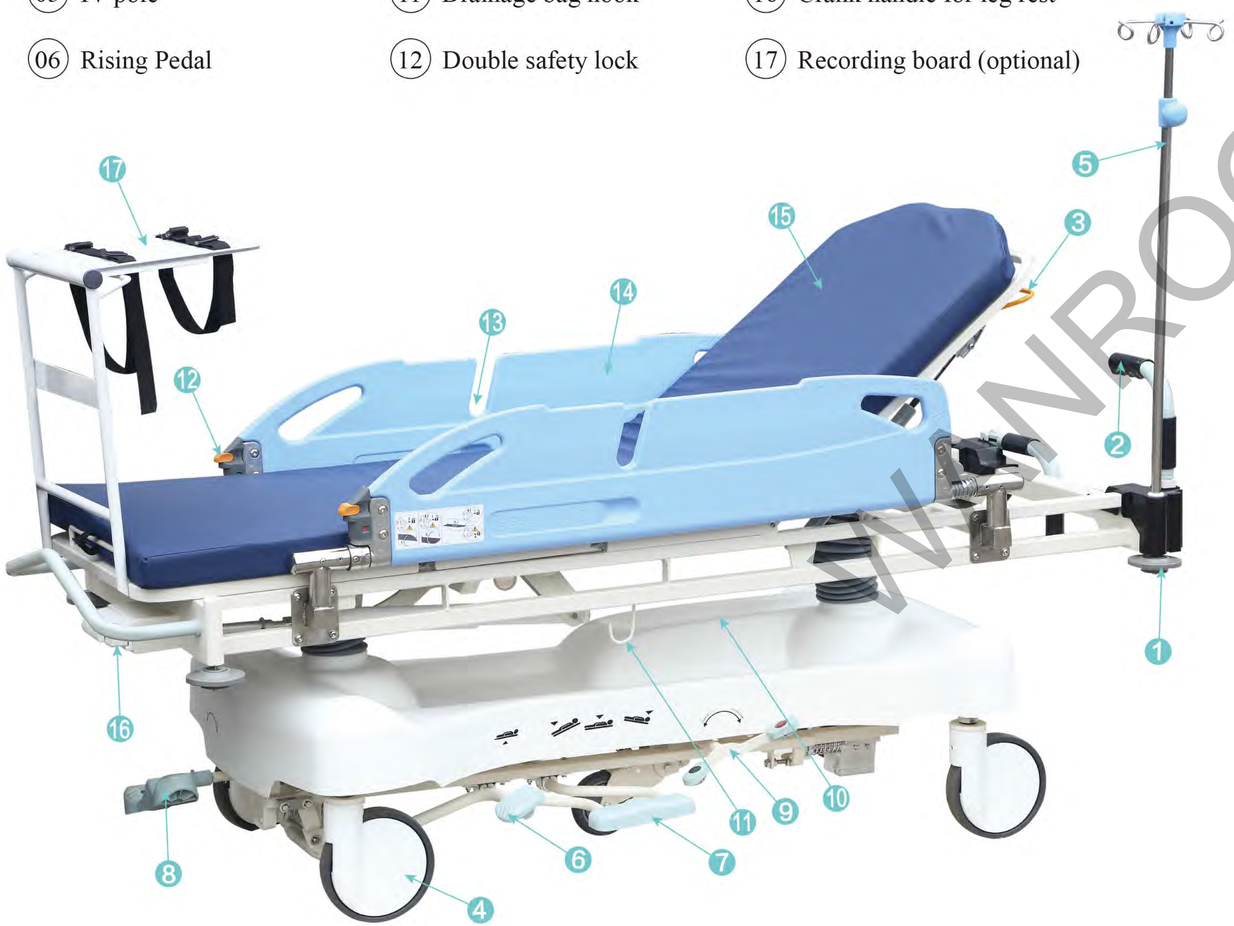

Rotary side rails

Side rails can be set at horizontal position for drip and puncture, pressure for 10kg, concave design can prevent catheter slide.

IV Pole

The bed is provided with a folding type IV pole on the foot and head side.

Central lock pedal Fifth wheel pedal

Lock pedals on front and back of the bed body, It is easy for nurses to operate.

Back lift operating lever

The yellow lifting handle is for achieving the back lift operation.

Conductive caster

The (yellow) conductive caster is grounding effect. It is 200mm diameter.

Bed body position display

Back up 0~90° | Knee up 0~40° | Rise and Fall 560~890mm | Trendelenburg 0~18° | Anti-trendelenburg 0~18°

Mattress

It is a 70mm thickness water proof mattress made with

Fifth wheel

It is easy controlling the direction of the bed when the bed is moving. Diameter of caster is 100mm.

Push handle

It uses P shape at the head side and U shape at the foot side to make it easy to push on.



Double safety lock

Rotary side rails using double safety lock to adjust the side rail position. It improves operational safety.

Product model		SJM006-F	
Size	length for surface	1880mm	
	Width for surface	620mm	
	Height from ground to bed surface	560mm	
Range of motion	Min and Max height	560mm~890mm	
	Back section Panel	0°~90°	
	Knee Section Panel	0°~40°	
	Tilt range	0°~18°	
Size for side rails		(Length)1470mmX(Height)340mm	(Length)1380mmX(Height)310mm
Diameter of Caster		200mm	
Size of mattress		(Length) 1860mmX (Width) 600mmX (Height) 70mm	
Size for recording board		(Length) 300mmX(Width) 400mm	
Size for Oxygen bottle holder		Diameter 140mm Max 4L	

WANROOEMED

BAM322MC 豪华三摇手病床

BAM322MC Luxurious Hospital Bed with Three Revolving Levers

- ◆ 床体尺寸 SIZE FOR FULLBED
  - 全长 FULL LENGTH 215CM
  - 全宽 FULL WIDTH 98CM
- ◆ 床面尺寸 SIZE FOR BED SURFACE
  - 床面长度 LENGTH FOR SURFACE 196CM
  - 床面宽度 WIDTH FOR SURFACE 90CM
  - 床面离地高度 BED BASE HEIGHT RANGE
  - 最高 MAXIMUM HEIGHT 70CM
  - 最低 MINIMUM HEIGHT 45CM
- ◆ 基本参数 BASIC PARAMETER
  - 背板上折角度 LEG SECTION PANEL 0°~≥70°
  - 脚板上折角度 LEG SECTION PANEL 0°~≥30°
- ◆ 承载能力 LOADING CAPACITY
  - 静载荷（均布）MAXIMUM STATIC SAFELOAD 400KG
  - 安全工作载荷 MAXIMUM DYNAMIC SAFELOAD 170KG
- ◆ 配置 CONFIGRATION
  - 中控静音脚轮 DIAMETER OF CENTRALLY SILENT CASTOR φ12.5CM
  - 可拆卸PP床头、床脚板 DETACHABLE PP HEAD AND FOOT BOARD
  - PP旋转护栏 PP ROTARY SIDE RAIL
  - 背板角度指示器 ANGLE INDICATER
  - 床垫（选配）MATTRESS(OPTIONAL)
  - 输液架（选配）IV POLE(OPTIONAL)
  - 表面静电粉末喷涂 TOP COATELECTROSTATIC POWDER COATING
  - 冷轧钢管床架 BED FRAME COLD-ROLLED STELL TURE
  - 冷轧钢板床面 BED BASE:COLD-ROLLED STEEL SHEET

BAE522EC-A 五功能豪华电动床

BAE522EC-A Luxurious Electric Bed with Five Functions

- ◆ 床体尺寸 SIZE FOR FULLBED
  - 全长 FULL LENGTH 223CM
  - 全宽 FULL WIDTH
  - 护栏升起时 INCLUDING THE SIDE RALL 105CM
  - 护栏放下时 WITHOUT THE SIDE RALL 99CM
- ◆ 床面尺寸 SIZE FOR BED SURFACE
  - 床面长度 LENGTH FOR SURFACE 196CM
  - 床面宽度 WIDTH FOR SURFACE 90CM
  - 床面离地高度 BED BASE HEIGHT RANGE
  - 最高 MAXIMUM HEIGHT 70CM
  - 最低 MINIMUM HEIGHT 45CM
- ◆ 基本参数 BASIC PARAMETER
  - 背板上折角度 LEG SECTION PANEL 0°~≥70°
  - 脚板上折角度 LEG SECTION PANEL 0°~≥30°
  - 床面整体前倾角度 TRENDELENBURG 0°~≥12°
  - 床面整体后倾角度 ANTI-TRENDELENBURG 0°~≥12°
- ◆ 承载能力 LOADING CAPACITY
  - 静载荷（均布）MAXIMUM STATIC SAFELOAD 400KG
  - 安全工作载荷 MAXIMUM DYNAMIC SAFELOAD 170KG
- ◆ 配置 CONFIGRATION
  - 中控静音脚轮 DIAMETER OF CENTRALLY SILENT CASTOR φ12.5CM
  - 护士控制器 NURSE CONTROLLER
  - 护栏控制器 RAIL CONTROLLER
  - 可拆卸PP床头、床脚板 DETACHABLE PP HEAD AND FOOT BOARD
  - PP旋转护栏 PP ROTARY SIDE RAIL
  - 单手操作“心肺复苏位”快速释放（CPR）CPR HANDLE
  - 床垫（选配）MATTRESS(OPTIONAL)
  - 输液架（选配）IV POLE(OPTIONAL)
  - 表面静电粉末喷涂 TOP COATELECTROSTATIC POWDER COATING
  - 冷轧钢管床架 BED FRAME COLD-ROLLED STELL TURE
  - 冷轧钢板床面 BED BASE:COLD-ROLLED STEEL SHEET

医用病床系列

BAM208MC 豪华二摇手病床

BAM208MC Luxurious Hospital Bed with Double Revolving Levers

- ◆ 床体尺寸 SIZE FOR FULLBED
  - 全长 FULL LENGTH 215CM
  - 全宽 FULL WIDTH
  - 护栏升起时 INCLUDING THE SIDE RALL 105CM
  - 护栏放下时 WITHOUT THE SIDE RALL 99CM
- ◆ 床面尺寸 SIZE FOR BED SURFACE
  - 床面长度 LENGTH FOR SURFACE 196CM
  - 床面宽度 WIDTH FOR SURFACE 90CM
  - 床面离地高度 BED BASE HEIGHT RANGE 52CM
- ◆ 基本参数 BASIC PARAMETER
  - 背板上折角度 LEG SECTION PANEL 0°~≥70°
  - 脚板上折角度 LEG SECTION PANEL 0°~≥30°
- ◆ 承载能力 LOADING CAPACITY
  - 静载荷（均布）MAXIMUM STATIC SAFELOAD 400KG
  - 安全工作载荷 MAXIMUM DYNAMIC SAFELOAD 170KG
- ◆ 配置 CONFIGRATION
  - 中控静音脚轮 DIAMETER OF CENTRALLY SILENT CASTOR φ12.5CM
  - 可拆卸PP床头、床脚板 DETACHABLE PP HEAD AND FOOT BOARD
  - PP旋转护栏 PP ROTARY SIDE RAIL
  - 背板角度指示器 ANGLE INDICATER
  - 床垫（选配）MATTRESS(OPTIONAL)
  - 输液架（选配）IV POLE(OPTIONAL)
  - 表面静电粉末喷涂 TOP COATELECTROSTATIC POWDER COATING
  - 冷轧钢管床架 BED FRAME COLD-ROLLED STELL TURE
  - 冷轧钢板床面 BED BASE:COLD-ROLLED STEEL SHEET

BAE522EC-B 五功能豪华电动床

BAE522EC-B Luxurious Electric Bed with Five Functions

- ◆ 床体尺寸 SIZE FOR FULLBED
  - 全长 FULL LENGTH 223CM
  - 全宽 FULL WIDTH
  - 护栏升起时 INCLUDING THE SIDE RALL 105CM
  - 护栏放下时 WITHOUT THE SIDE RALL 99CM
- ◆ 床面尺寸 SIZE FOR BED SURFACE
  - 床面长度 LENGTH FOR SURFACE 196CM
  - 床面宽度 WIDTH FOR SURFACE 90CM
  - 床面离地高度 BED BASE HEIGHT RANGE
  - 最高 MAXIMUM HEIGHT 70CM
  - 最低 MINIMUM HEIGHT 45CM
- ◆ 基本参数 BASIC PARAMETER
  - 背板上折角度 LEG SECTION PANEL 0°~≥70°
  - 脚板上折角度 LEG SECTION PANEL 0°~≥30°
  - 床面整体前倾角度 TRENDELENBURG 0°~≥12°
  - 床面整体后倾角度 ANTI-TRENDELENBURG 0°~≥12°
- ◆ 承载能力 LOADING CAPACITY
  - 静载荷（均布）MAXIMUM STATIC SAFELOAD 400KG
  - 安全工作载荷 MAXIMUM DYNAMIC SAFELOAD 170KG
- ◆ 配置 CONFIGRATION
  - 中控静音脚轮 DIAMETER OF CENTRALLY SILENT CASTOR φ12.5CM
  - 护士控制器 NURSE CONTROLLER
  - 护栏控制器 RAIL CONTROLLER
  - 可拆卸PP床头、床脚板 DETACHABLE PP HEAD AND FOOT BOARD
  - PP旋转护栏 PP ROTARY SIDE RAIL
  - 单手操作“心肺复苏位”快速释放（CPR）CPR HANDLE
  - 床垫（选配）MATTRESS(OPTIONAL)
  - 输液架（选配）IV POLE(OPTIONAL)
  - 表面静电粉末喷涂 TOP COATELECTROSTATIC POWDER COATING
  - 冷轧钢管床架 BED FRAME COLD-ROLLED STELL TURE
  - 冷轧钢板床面 BED BASE:COLD-ROLLED STEEL SHEET

WANROOEMED

BAE515EC 五功能豪华电动床

BAE515EC Luxurious Electric Bed with Five Functions

◆床体尺寸 SIZE FOR FULL BED
- 全长 FULL LENGTH 223cm
- 全宽 FULL WIDTH 105cm
- 护栏升起时 INCLUDING THE SIDE RAIL 45cm
- 护栏放下时 WITHOUT THE SIDE RAIL 4.5cm

◆床面尺寸 SIZE FOR BED SURFACE
- 床面长度 LENGTH FOR SURFACE 196cm
- 床面宽度 WIDTH FOR SURFACE 90cm
- 床面离地高度 BED BASE HEIGHT RANGE
  - 最高 MAXIMUM HEIGHT 70cm
  - 最低 MINIMUM HEIGHT 45cm

◆基本参数 BASIC PARAMETER
- 背板上折角度 BACK SECTION PANEL 0°～≥70°
- 腿板上折角度 LEG SECTION PANEL 0°～≥30°
- 床面整体前倾角度 TRENDELENBURG 0°～≥12°
- 床面整体后倾角度 ANTI-TRENDELENBURG 0°～≥12°

◆承载能力 LOADING CAPACITY
- 静载荷(均布) MAXIMUM STATIC SAFE LOAD 400Kg
- 安全工作载荷 MAXIMUM DYNAMIC SAFE LOAD 170Kg

◆配 置 CONFIGRATION
- 中控静音脚轮 DIAMETER OF CENTRALLY SILENT CASTOR φ12.5cm
- 护士控制器 NURSE CONTROLLER
- 手控操作器
- 可拆卸PP床头、床脚板 DETACHABLE PP HEAD AND FOOT BOARD
- 金属折叠护栏
- 背板角度指示器 ANGLE INDICATER
- 单手操作"心肺复苏位"快速释放(CPR) CPR HANDLE
- 床垫（选配） MATTRESS (OPTIONAL)
- 输液架（选配） IV POLE (OPTIONAL)
- 表面静电粉末喷涂 TOP COAT: ELECTROSTATIC POWDER COATING
- 冷轧钢管床架 BED FRAME: COLD-ROLLED STEEL TUBE
- 冷轧钢板床面 BED BASE: COLD-ROLLED STEEL SHEET

BIC700EC 七功能豪华电动床

BIC700EC Luxuruious Hospital Bed with seven Functions

￥52000

◆床体尺寸 Measurement
- 全长 223cm；Full Lenfth 223cm
- 全宽 Full Width
  - 护栏升起时 Including The side Rails 105cm
  - 护栏放下时 Without The side Rails 99cm

◆床面尺寸 Bed base measurement
- 床面长度 Bed base Lengtg 196cm
- 床面宽度 Bed base Width 90cm
- 床面升降行程 Bed Vertical moving range 40cm

◆基本参数：Technical Features
- 背板上折角度 Back Section Panel 0～≥70°
- 腿板上折角度 Leg section Panel 0°～≥30°
- 床面左倾角度 Left Leaning 0°～≥17°
- 床面右倾角度 Right Leaning 0°～≥17°
- 床面前倾角度 Trebdelenburg 0°～≥12°
- 床面后倾角度 Anti-Tendelenburg 0°～≥12°

◆承载能力 Loadinf Capacity 250kg
- 静载荷 Loading Capacity 400kg
- 安全工作载荷 Maximum Safe Load 170kg

◆配置：Special Allocation
- 中控静音脚轮，豪华轻便型不锈钢刹车操纵杆；
- Diameter of centrally silent castor φ15cm
- 左右两侧各四只控制脚踏板，均可独立操纵床面整体升降及左右倾功能；
- All Functions can be controlled by the padels on Both side
- 手持式护士控制器；Hand set control
- 护栏控制器；Side rail ontrol
- 电子自动称重系统(选配)，计量单位：公斤/英镑，可切换；Weight reading system
- 床脚板控制显示面板：nurse contyol
- 床面板：背板选用美国进口电木板，可透过X射线；Bask Rest X-ray (Electric Panel made in Ameroca)
- "心肺复苏位"快速释放(CPR)；CPR
- 床框四角各配一只软性塑料防撞轮；Plaseic numpers on four corner
- PP护栏；PP side rail
- 床垫(选配)；Matress
- 输液架(选配)；IV POLE(optional)
- 表面静电粉末喷涂。TOP Coat(Electrostatic Powder Coaeing)

BD002-B 新型豪华手摇平车

BD002-B Luxuruious Rise-and-Fall stretcher cart

￥9500

●车体尺寸：Measurement
- 全长 Full Lenfth 193cm
- 全宽 Full Width 64cm

●床面高度：Bed Base Height Range
- 最高 Maximum Height 90cm
- 最低 Minimum Height 50cm

●基本参数：Technical Features
- 背板上折角度 Back Section Panel 0～≥70°

●承载能力：Loadinf Capacity
- 静载荷 Loading Capacity 250kg
- 安全工作载荷 Maximum Safe Load 135kg

●配置：Special Allocation

新型豪华减震导向、刹车一体式中控脚轮(φ15cm)，三档位脚轮操纵杆；

Shock Proog system Figth Wheel & Centrally Silent Caseor.(Dianerer:15cm)

PP床面板；PP Bed Base

"心肺复苏位"快速释放(CPR)；CPR

三档位铝合金折叠护栏；Aluminum alloy side rail

床垫(选配)；Matress(optional)

输液架(选配)；IV POLE(optional)

表面静电粉末喷涂。TOP Coat(Electrostatic Powder Coaeing)

BD002-C 型豪华手摇平车

BD002-C New style Luxurious Electric Rise-and-Fall Stretcher Cart

￥15000

●车体尺寸 SIZE FOR FULL CART
- 全长 FULL LENGTH 193cm
- 全宽 FULL WIDTH 64cm

●床面高度 BDE BASE HEIGHT RANGE
- 最高 MAXIMUM HEIGHT 90cm
- 最低 MINIMUM HEIGHT 50cm

●基本参数 BASIC PARAMETER
- 背板上折角度 BACK SECTION PANEL 0°～≥70°

●承载能力 LOADING CAPACITY
- 静载荷(均布) MAXIMUM STATIC SAFE LOAD 250Kg
- 安全工作载荷 MAXIMUM DYNAMIC SAFE LOAD 135Kg

●配 置 CONFIGRATION
- PP床面 PP BDE BDSE
- "心肺复苏位"快速释放(CPR) CPR HANDLE
- PP护拦 PP SIDE RAIL
- 床垫（选配） MATTRESS (OPTIONAL)
- 输液架（选配） IV POLE (OPTIONAL)
- 表面静电粉末喷涂 TOP COAT: ELECTROSTATIC POWDER COATING
- 铝合金床架 BDE FRAME ALUMINUM ALLOY SIDE RAIL

WANROOEMED

BD002-D 型豪华手摇平车（翻转护栏）

BD002-D New style Luxurious Electric Rise-and-Fall Stretcher Cart

￥15000

●车体尺寸：Measurement

全长 Full Lenfth	193cm
全宽 Full Width	64cm
●床面高度：Bed Base Height Range	
最高 Maximum Height	90cm
最低 Minimum Height	50cm
●基本参数：Technical Features	
背板上折角度 Back Section Panel	0～≥70°
●承载能力：Loadinf Capacity	
静载荷 Loading Capacity	250kg
安全工作载荷 Maximum Safe Load	135kg

●配置：Special Allocation

新型豪华减震导向、刹车一体式中控脚轮(φ15cm)，三档位脚轮操纵杆；

Shock Proog system Figth Wheel & Centrally Silent Caseor.(Dianerer:15cm)

PP床面板；PP Bed Base

“心肺复苏位”快速释放(CPR)；CPR

PP护栏；PP side rail

床垫(选配)；Matress(optional)

输液架(选配)；IV POLE(optional)

表面静电粉末喷涂。TOP Coat(Electrostatic Powder Coaeing)

BD303 豪华称重液压升降平车

BD303 Luxurious Hydraulic Rise-and-Fall Stretcher Cart with Weight Readings

￥32000

●车体尺寸 SIZE FOR FULL CART

全长 FULL LENGTH	212cm
全宽 FULL WIDTH	80cm
●床面高度 BDE BASE HEIGHT RANGE	
最高 MAXIMUM HEIGHT	93cm
最低 MINIMUM HEIGHT	63cm
●基本参数 BASIC PARAMETER	
背板上折角度 BACK SECTION PANEL	0°～≥70°
腿板上折角度 LEG SECTION PANEL	0°～≥30°
床面整体前倾角度 TRENDELENBURG	0°～≥12°
床面整体后倾角度 ANTI-TRENDELENBURG	0°～≥12°
●承载能力 LOADING CAPACITY	
静载荷(均布) MAXIMUM STATIC SAFE LOAD	250Kg
安全工作载荷 MAXIMUM DYNAMIC SAFE LOAD	135Kg
●配 置 CONFIGRATION	
中控静音防尘脚轮 DIAMETER OF CENTRALLY SILENT CASTOR	ϕ20cm

新型减震式导向系统 SHOCK PROOF SYSTEM FIFTH WHEEL

两个独立液压泵 TWO HYDRAULIC PUMPS

液压控制踏板 HYDRAULIC CONTROL PANEL

床架背板可透过X光线(用美国产电木板制成)

BACKRESTMAYX-RAY(ELECTRIC PANEL MADE IN AMERICA)

单手操作“心肺复苏位”快速释放(CPR) CPR HANDLE

铝合金折叠护拦 ALUMINUM ALLOY SIDE RAIL

床垫（选配） MATTRESS (OPTIONAL)

输液架（选配） IV POLE (OPTIONAL)

电子自动称重系统（选配） WEIGHT READING SYSTEM (OPTIONAL)

量测精度 ACCURACY OF MEASUREMENT	0.1Kg
可选配 OPTIONAL 0.05Kg 0.02Kg	

表面静电粉末喷涂 TOP COAT: ELECTROSTATIC POWDER COATING

冷轧钢管床架 BED FRAME: COLD-ROLLED STEEL TUBE

BD004-A 豪华液压升降平车

BD004-A Luxurious Hydraulic Rise-and-Fall Stretcher Cart

￥32000

●车体尺寸：measurement

全长 Full Lenfth	193cm
全宽 Full Width	70cm
●床面高度：Bed Base Height Range	
最高 Maximum Height	93cm
最低 Minimum Height	63cm
●基本参数：Technical Features	
背板上折角度 Back Section Panel	0°～≥70°
床面前倾角度 Trebdelenburg	0°～≥12°
床面后倾角度 Anti-Tendelenburg	0°～≥12°
●承载能力：Loadinf Capacity	
静载荷 Loading Capacity	250kg
安全工作载荷 Maximum Safe Load	135kg
●配置：Special Allocation	
中控静音脚轮 Diameter of centrally silent castor	φ20cm

新型减震式导向系统；Shock Proof system fifth wheel

导向轮及中控脚轮联动控制、头尾及两侧“三档位”四组操纵踏板独立操纵； Combined centrally silent castor and fifth wheel system

两个独立液压泵；Two Hyclraulic Pumps

液压控制踏板；Hydraulic control panel

美国进口电木板床面板；X-Ray celectric Paneel made in Americal

“心肺复苏位”快速释放(CPR)；CPR

三档位铝合金折叠护栏；Aluminum alloy side rail

翻转式监护仪托架；Monitor tray

引流钩；Drainage Hook

床垫(选配)；Matress(optional)

输液架(选配)；IV POLE(optional)

表面静电粉末喷涂。TOP Coat(Electrostatic Powder Coaeing)

BD004-B 豪华液压升降平车

BD004-B Luxuruious Hydraulic Rise-and-Fall Stretcher Cart

￥34000

●车体尺寸 measurement

全长 Full Lenfth	193cm
全宽 Full Width	70cm
●床面高度 Bed Base Height Range	
最高 Maximum Height	93cm
最低 Minimum Height 63cm	
●基本参数：Technical Features	
背板上折角度 Back Section Panel	0°～≥70°
床面前倾角度Trebdelenburg	0°～≥12°
床面后倾角度 Anti-Tendelenburg	0°～≥12°
●承载能力 Loadinf Capacity	
静载荷 Loading Capacity	250kg
安全工作载荷 Maximum Safe Load；	135kg
●配置 Special Allocation	
中控静音脚轮 Diameter of centrally silent castor	φ20cm

新型减震式导向系统；Shock Proof system fifth wheel

导向轮及中控脚轮联动控制、头尾及两侧“三档位”四组操纵踏板独立操纵；Combined centrally silent castor and fifth wheel system

两个独立液压泵；Two Hyclraulic Pumps

液压控制踏板；Hydraulic control panel

PP床面板；PP bed base

“心肺复苏位”快速释放(CPR)； CPR

铝合金折叠护拦； ALUMINUM ALLOY SIDE RAIL

床垫(选配)；Matress(optional)

输液架(选配)；IV POLE(optional)

表面静电粉末喷涂。TOP Coat(Electrostatic Powder Coaeing)

WANROOEMED

医用病床系列

BD012 型 换轮式手术交换车

BD012 LUXURIOUS CART FOR HAND-OVER OF PATIENTS TO AND FROM OPERATION ROOM

￥16000

●车体尺寸：measurement	
全长Full Length	190cm
全宽Full Width	64cm
带护栏（With side rail）	73cm
●床高范围（床面高度）（bed base height range）	
最高（大轮子）（Maximum Height）	88cm
最低（小轮子）（Minimum Height）	69cm
●床板位置调节（Bed base angle position adjustable）	
背板（Back section panel）	0-80°
●最大承重（Maximum safe load）	250kg
●配置：Special Allocation	
输液架（I.V.Pole）	
可升降导向轮（Rise-and-Fall Guide Wheel）	
床垫（选配）（Mattress(Optional)）	
PP护栏（PP side rail）	
PP床面（PP Bed base）	
“心肺复苏位”快速释放把手（CPR）	
表层静电粉末喷涂（Top Coat:Electrostatic Powder coating）	
净重（N.W.）	135kg

BKR012 PP旋转护栏
BKR012 Rotary Side Rail

规格(Size): 65×24cm
83×24cm

BKR013 PP旋转护栏
BKR013 Rotary Side Rail

规格(Size): 56×40cm 113×46cm

BKR008 PP旋转护栏
BKR008 Rotary Side Rail

规格(Size): 81×31cm 112×31cm

BKR009 PP旋转护栏
BKR009 Rotary Side Rail

规格(Size): 66×34cm 107×34cm

BKR010 PP旋转护栏
BKR010 Rotary Side Rail

规格(Size): 81×31cm 112×31cm

BKR011 PP旋转护栏
BKR011 Rotary Side Rail

规格(Size): 66×34cm 107×34cm

WANROOEMED